

CSMIO/IP-M

4.4 Analog I/O connector

PIN number	Description
1	Analog output 0
2	GND
3	Analog input 1
4	-
5	10V (max. 50mA)
6	Analog output 1
7	Analog input 0
8	GND
9	-

4.6 Power connector

PIN number	Description
1	Power - 24V DC
2	GND
3	Ground


0-10V

4,2KOhm 1/4W


Electrical Connections

Pin	Function	PLH3D-6W-XF	PLH3D-6W
1	Modulation Input 1	✓	✓
2	Modulation Input 2	✓	✗
3	Signal GND	✓	✓
4	Vcc GND	✓	✓
5	Vcc	✓	✓

Power Supply

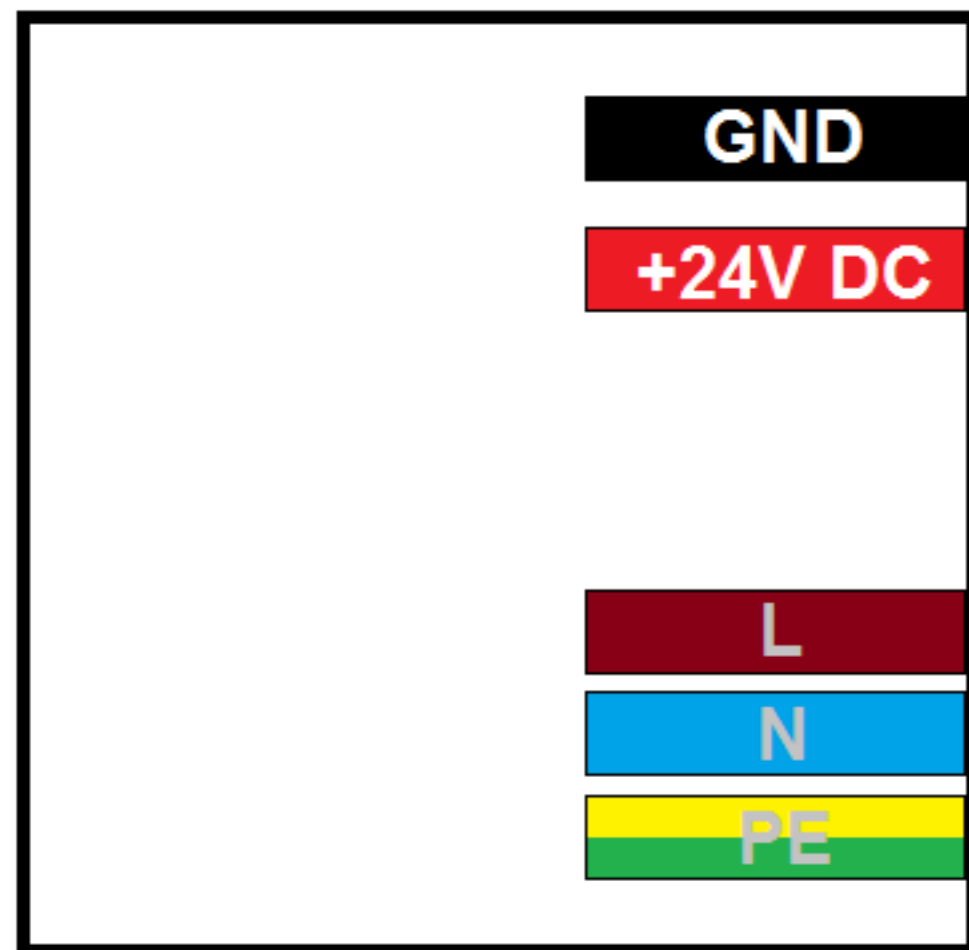

Power Supply

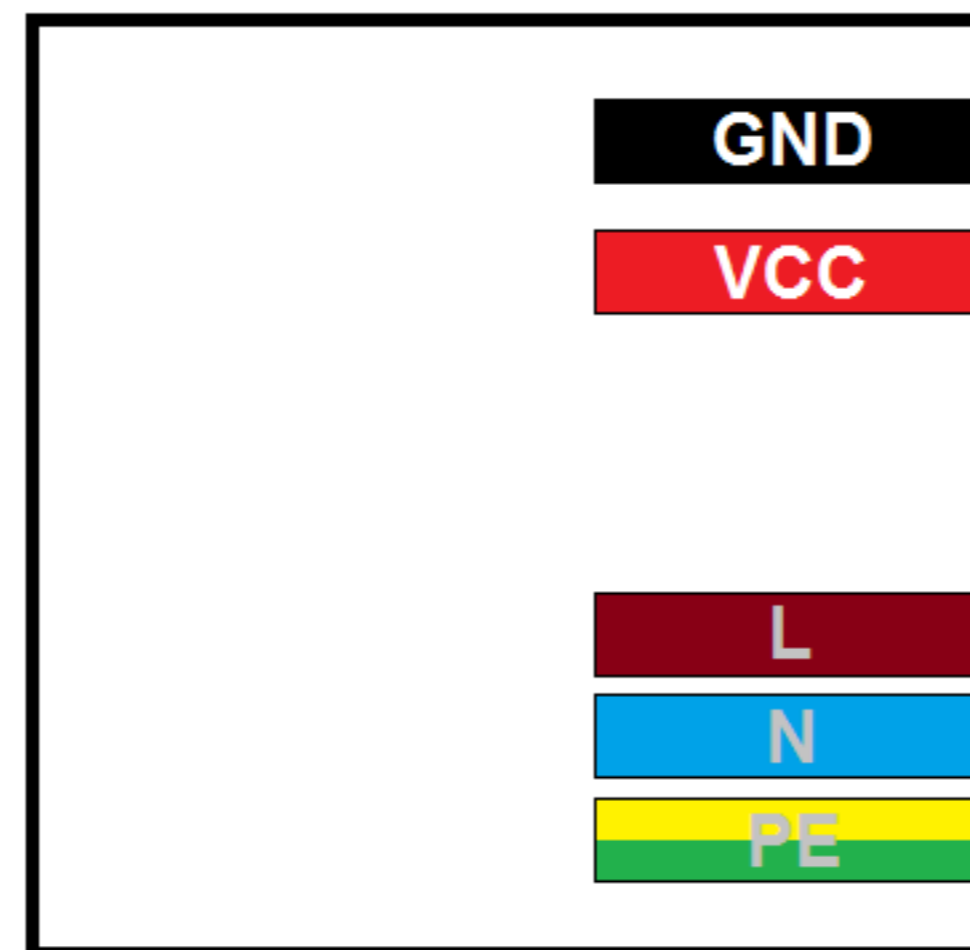

PE

