


CSMIO / IP-M controller does not support the index signal

CSMIO / IP-M controller does not support the index signal

CSMIO/IP-M


4.3 Digital inputs connector

PIN number	Description
1	0 (+) Input
14	DIR[0]-
1	DIR[0]+
15	STEP[0]-
2	STEP[0]+
9	24V power supply for 0.3 outputs
10	Output 0
22	0V power supply for 0.3 outputs
16	DIR[1]-
3	DIR[1]+
17	STEP[1]-
4	STEP[1]+
18	DIR[2]-
5	DIR[2]+
19	STEP[2]-
6	STEP[2]+
1	Power = 24V DC
2	GND
3	ground

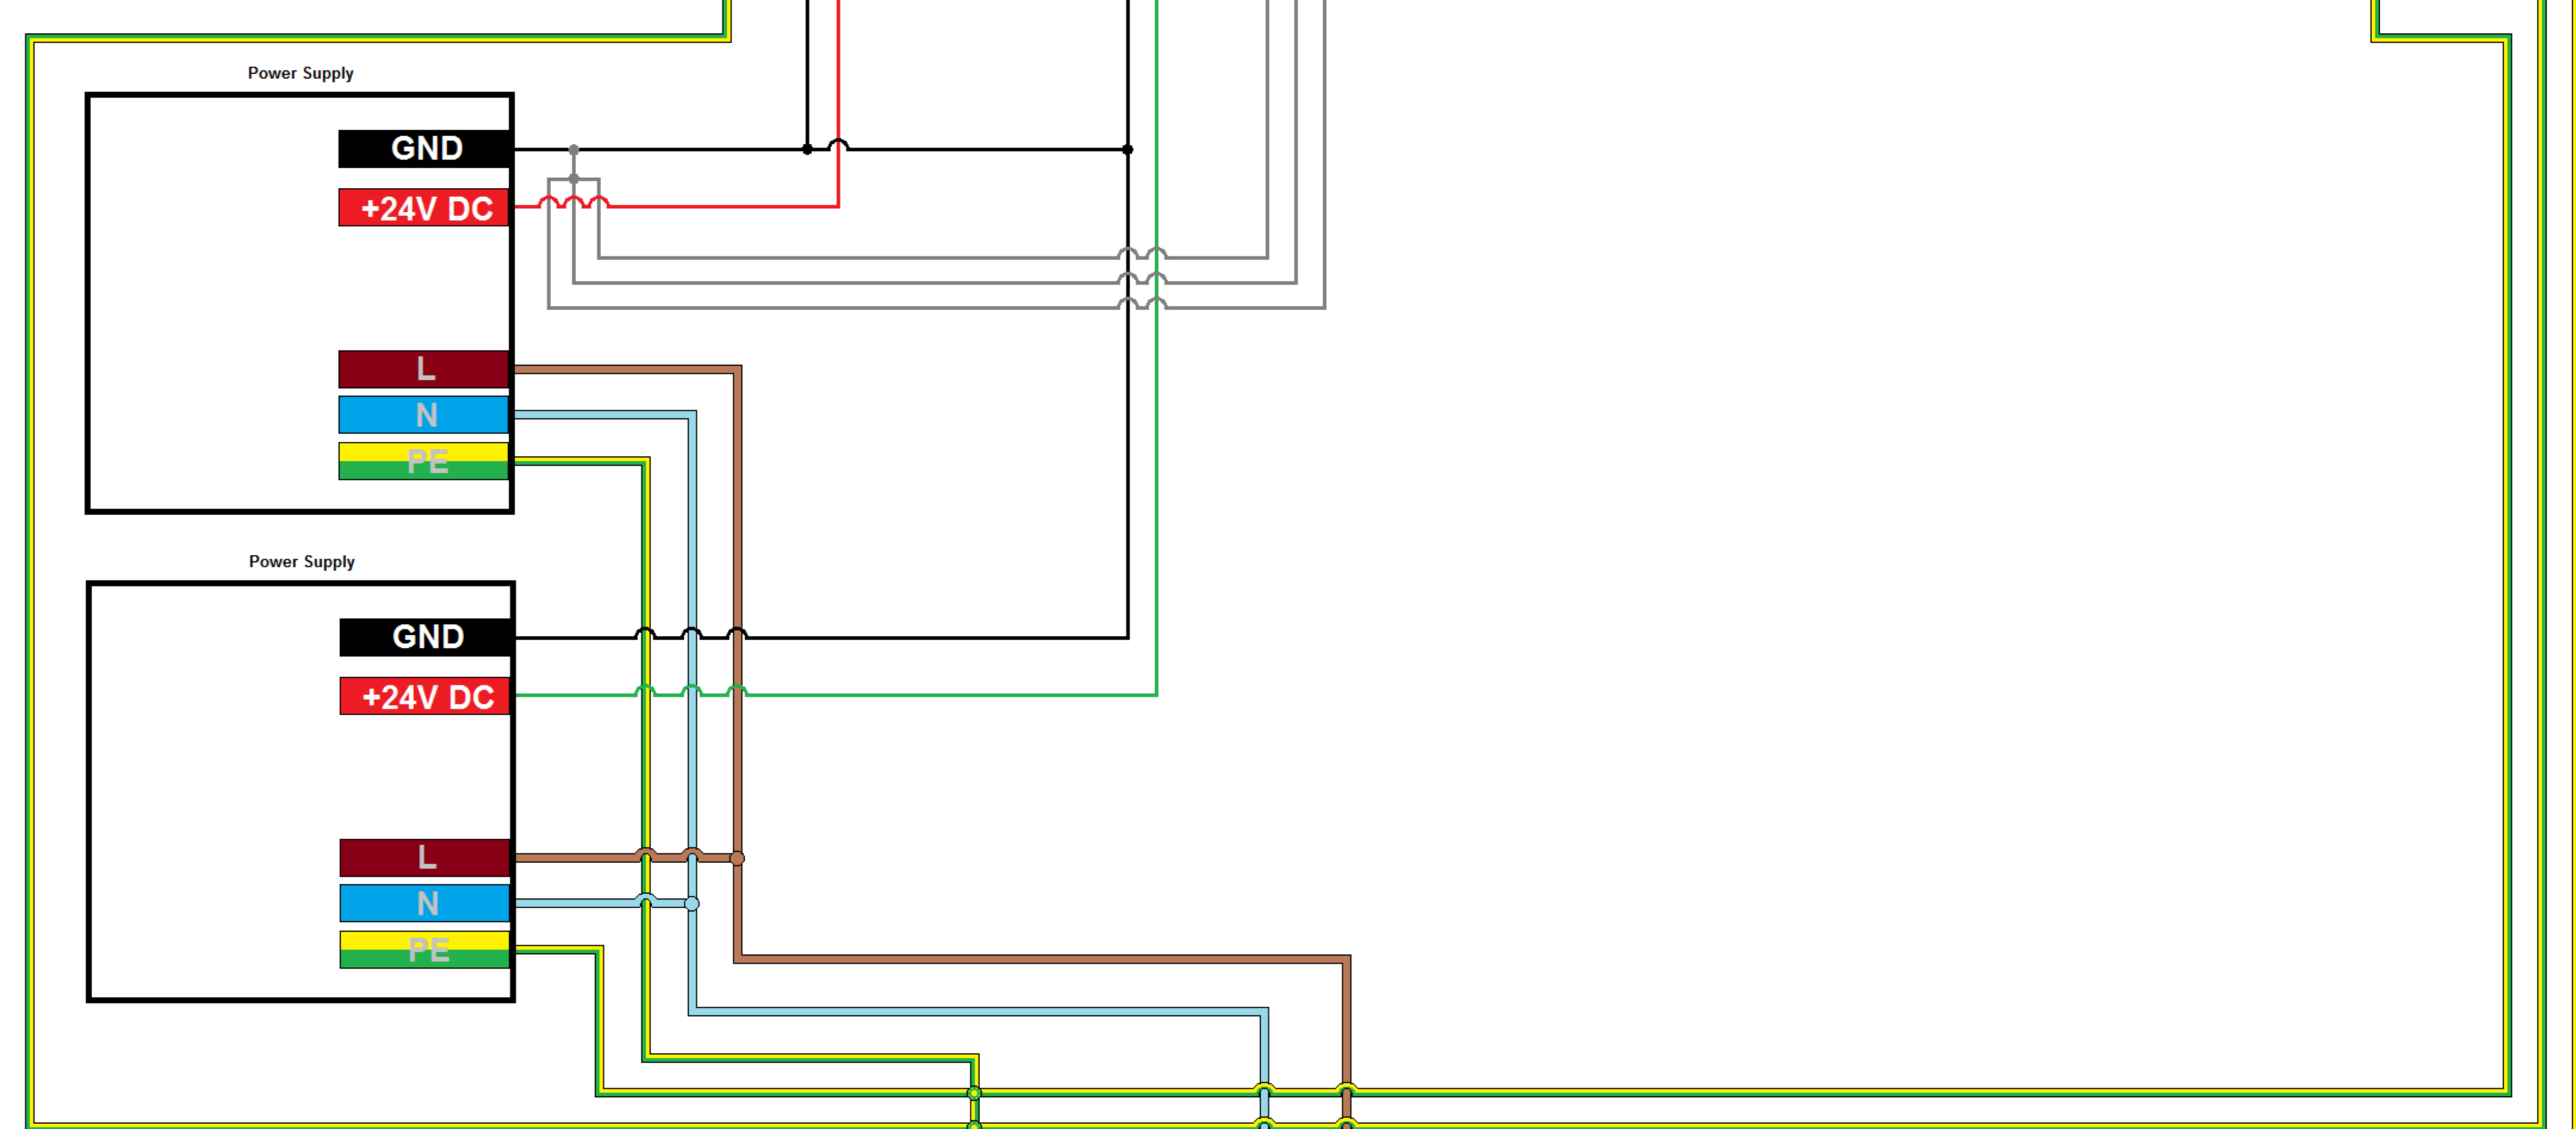

Earth Bars
Listwa uziemiająca

To the metal housing
Do metalowej obudowy

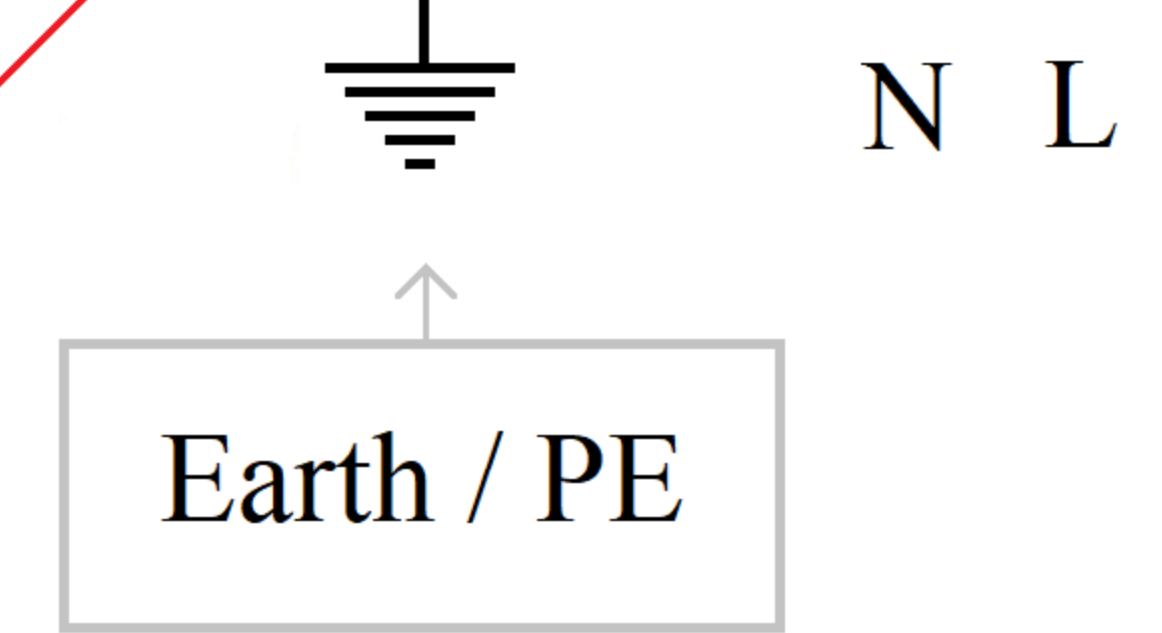

PMM-MD-53031-10

X

Y

Z